

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL

(For new non-provisional applications under 37 CFR § 1.53(b))

Atty. Dkt. No:	5181-71100
Inventor(s):	Cynthia Milton
Title:	Rack Mountable Display Apparatus

07/24/00

CERTIFICATE OF EXPRESS MAIL
 UNDER 37 C.F.R. § 1.10

"Express Mail" mailing label number: EL588940260US
 DATE OF DEPOSIT: 7/24/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to:

Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

Debra H. Tix
 Debra H. Tix

Application Elements

1. ☒ Filing Fee

The filing fee is calculated as shown below.

Total Claims	31	-20=	11	x \$18.00=	\$198.00
Independent Claims	3	-3 =	0	x \$78.00=	
Multiple Dependent Claims				Fee:	
				Basic Fee:	\$690.00
				Assignment Fee	\$40.00
				Sub-Total:	\$928.00
				Reduction by 50% for Small Entity:	
				Total:	\$928.00

- ☒ A credit card authorization for the amount of \$928.00 is enclosed.
 The Commissioner is hereby authorized to charge any other fees which may be required or credit any overpayment to Conley, Rose, & Tayon, P.C., Deposit Account No. 03-2769/5181-71100/BNK.
2. ☒ Specification
 16 page(s) of specification; 1 page(s) of claims, 4 page(s) of abstract
3. ☒ Drawings
 Formal Figure(s) 1-7 on 8 sheet(s)
4. ☒ Oath or Declaration
☒ Newly executed
☐ Copy from a prior application (see 37 C.F.R. § 1.63(d))
 Deletion of Inventor(s) (in continuation or divisional applications):
☐ Delete the following inventor(s) named in the prior non-provisional application:
☐ The inventor(s) to be deleted are set forth on a signed sheet attached hereto.
5. ☐ The entire disclosure of the prior application referred to above is considered to be part of the accompanying application and is hereby incorporated by reference herein.

07/24/00
 09/21/00
 07/24/00

6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- ☐ Computer Readable copy
- ☐ Paper Copy (identical to computer copy)
- ☐ Statement verifying identity of above copies
8. ☒ Assignment Papers
9. Power of Attorney
- ☒ Is attached.
- ☐ The power of attorney appears in the original papers of the prior application.
- ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
10. ☐ Information Disclosure Statement (IDS)
- ☐ Copies of IDS Citations
11. Amendments
- ☐ A preliminary amendment is enclosed.
- ☐ Cancel in this application claim(s) _____ before calculating the filing fee. At least one independent claim is retained for filing purposes.
- ☐ Amend the specification by inserting before the first line the sentence: _____.
12. ☒ Return Receipt Postcard
13. Small Entity Status
- ☐ A small entity statement is enclosed.
- ☐ A small entity statement was filed in the prior non-provisional application and such status is still proper and desired.
- ☐ Is no longer claimed.
14. ☒ Priority of foreign application number 0008722.1, filed on April 7, 2000 in the United Kingdom is claimed under 35 U.S.C. §§ 119(a)-(d)
15. ☐ Petition under 37 C.F.R. § 136 for Extension of Time
16. ☒ Other: Credit Card Authorization Form authorizing payment of filing fees in the amount of \$928.00.

Address all future correspondence to:

B. Noël Kivlin
Conley, Rose, & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767
Phone: (512) 476-1400 Fax: (512) 703-1250

Signature

Name

Registration No.

Date

33,929

B. Noël Kivlin

7-24-00

SUN REF: P4262

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION PAPERS

OF

CYNTHIA MILTON

FOR

RACK MOUNTBLE DISPLAY APPARATUS

RACK MOUNTABLE DISPLAY APPARATUS

BACKGROUND OF THE INVENTION

- 5 This invention relates to equipment racks, and in particular to display apparatus for such a rack.

Equipment racks provide a standard way of arranging various components to form a system. In such a rack, an external frame supports slotted bars, to which are attached
10 individual system components. An application for such a rack system is in the computer and telecommunications fields. In a particular example, rack mountable equipment can comprise components of a fault tolerant computer system. Such fault tolerant computer systems are used, for example, to implement switches and other data nodes within a telecommunication system. As a result of the nature of such
15 equipment, it is often situated at a remote location, and needs to be serviced by visiting service personnel. Such equipment is complex, and the maintenance operations to be performed can also be complex. As there are many different configurations of equipment, and many different maintenance operations that might need to be performed, the service engineer needs to carry round a significant quantity
20 of manuals and other documentation to facilitate maintenance of the equipment. It would be desirable to leave suitable maintenance information with the rack-mounted equipment. However, given that the rack-mounted equipment may be at a remote, unsupervised location, and also that it may be in an environment where limited space is available, storage of such materials can be a problem.

25

Accordingly, the present invention seeks to address this problem.

SUMMARY OF THE INVENTION

Particular and preferred aspects of the invention are set out in the accompanying independent and dependent claims. Combinations of features from the dependent
5 claims may be combined with features of the independent claims as appropriate and not merely as explicitly set out in the claims.

In accordance with an aspect of the invention, there is provided rack mountable display apparatus for an electronic equipment rack. The apparatus includes a support
10 mechanism for a display. The display is moveable between a storage position within the rack and a deployed position external to the rack.

By providing a display that can be stored in the rack and then be deployed into an operative, deployed position, a display for displaying information to support personnel
15 can be stored out of the way in the rack and can then be deployed when it is needed. This is space efficient and avoids the need for the maintenance personnel to carry around maintenance instructions for all types of rack mountable equipment that they might encounter.

20 In one embodiment the display is slideable between the storage position with the display stored within the rack and the deployed position with the display deployed externally to the rack. In another embodiment the display is pivotable between the storage position with the display stored within the rack and the deployed position with the display deployed externally to the rack.

25 The support mechanism can also provide for orientation of the display in the deployed position to facilitate reading of the display. This could be achieved by one or more pivot arrangements, for example, to enable the display to be swung away from the rack and/or to be held at a desired orientation to the vertical to facilitate the reading of
30 information therefrom by support personnel.

In one embodiment, a universal joint could be provided to enable pivoting of the display between the storage position and the deployed position and further to enable orientation of the display to facilitate reading of the display.

5

In preferred embodiments of the invention, the thickness of the display is less than the height and width of the display. This enables the display to be held, when in the storage position, substantially vertically. This minimises the impact of the display on the flow of cooling air through the rack, the flow of cooling air being normally

- 10 configured to be from bottom to the top of the rack. If the display in the storage position is also arranged to minimise the frontal area, when viewing the rack from the front, this means that the display occupies a minimum frontal area, maximising the space available for the operative electronic components in the rack.

- 15 In one simple embodiment, the display is formed by a plurality of sheets of material, for example sheets of plasticised card, that are held together on a carrier (for example by rings passing through holes in the sheets of display material) on the display support. Service personnel can leaf through the sheets to find the maintenance information needed to carry out appropriate maintenance operations.

20

In another embodiment, the display comprises a display screen. This enables more comprehensive information to be supplied to the support personnel, for example in the form of an interactive set of instructions and information.

- 25 Preferably a flat panel display, for example an LCD display is used to minimise the storage space needed for the display when in both the storage and the deployed positions.

- By providing a touch panel display, the display can be used for the input of
30 information, avoiding the necessity for a separate keyboard or other input device.

By connecting the display to a processor, the control of the interactive display of instructions and information can be controlled by program code.

- 5 The processor could be retained within the rack when the display is deployed, the processor being connected to the display. Alternatively, the processor could be deployed with the display. Indeed, in one embodiment of the invention the display and the processor form parts of a portable computer. Whether or not a touch sensitive screen is provided, a keyboard and/or other conventional user input devices can be
10 provided.

An electronic equipment rack can be configured to provide a plurality of locations for receiving electronic equipment components and also a location for receiving the display apparatus as set out above.

- 15 The location for the display apparatus is preferably arranged in the rack such that the display is located in a substantially vertical orientation extending back into the rack from a front surface thereof when in the storage position within the rack. This can minimise the impact on airflow through the rack and minimise the frontal area of the
20 rack occupied by the display when mounted in the rack.

In a preferred embodiment the display location is adjacent one side of the rack so that it can be deployed to extend beyond one side of the rack when in the deployed position, thereby not to inhibit access to rack mountable component.

- 25 Where the display is connected to a processor, the processor is preferably connected to at least one of the electronic system components in the rack for receiving status information. Program code is then arranged to control the processor to cause the display of an interactive sequence of instructions to service personnel for maintaining

the electronic rack equipment, with the program code responsive to the status information for controlling the interactive sequence of instructions.

In accordance with another aspect of the invention, there is provided a method of
5 providing maintenance information to personnel for maintaining electronic equipment mounted in a rack. The method comprises providing a support mechanism for a display, the display being moveable between a storage position within the rack and a deployed position external to the rack. The method can further comprise providing maintenance information to the support personnel when the display is located in the
10 deployed position.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the present invention will be described hereinafter, by way of example only, with reference to the accompanying drawings in which like reference signs relate to like elements and in which:

Figure 1 is a schematic overview of the front of a rack containing rack mountable equipment;

Figures 2A - 2D are schematic plan views illustrating the deployment of a slideably mounted display and Figure 2E is a further schematic illustration of details of the support for a slideably mounted display;

Figures 3A - 3D are schematic front views representing the deployment of a pivotally mounted display;

Figures 4A - 4C represent the opening of a display based on sheets of display material;

Figures 5A - 5C represent the opening of a display forming part of a portable computer;

Figure 6 is a flow diagram illustrating a method of use of a display as shown in Figure 3.

DESCRIPTION OF THE PARTICULAR EMBODIMENTS

In the following, particular embodiments of the invention will be described by way of example only.

5

Figure 1 is a schematic front view of an equipment rack 10 that includes a chassis, or frame, 12 defining a plurality of locations, or areas, 14 for receiving various components of an electronic system. In the present example, the components form part of a fault tolerant multiprocessor computing system for a telecommunications

10 apparatus.

Examples of the components forming part of the fault tolerant computer system at the various locations 14 are processor modules 15, removable media modules 16 for tapes, removable disks, etc., fixed disk drives 18, console and fan units 20 that include
15 switches, ports, alarms and LEDs (Light Emitting Diodes), etc., PCI (Peripheral Component Interface) cards 22 and power supply units 24.

Also provided within this embodiment of a racking system in accordance with the invention is a first specific location, or slot, 26 for receiving a retractable display 28.
20 Optionally, a second specific location, or slot, 30 can be provided for a maintenance processor 32 that is connected by power and signal connections to the display 28.

The retractable display is arranged to be retained in a retracted, or storage position in the slot 26 within the rack 10 and to be moved to deployed and operative positions
25 outside to the front of the rack 10.

When in the storage position, the display 28 is oriented in a substantially vertical orientation extending back into the rack 10 from the front thereof. This arrangement minimises the impact on the cooling airflow through the rack (which is arranged to be

from bottom to top) and to minimise the frontal area of the rack 10 occupied by the display when stored in the rack 10.

As will be described later, when in the operative position, the display is preferably
5 located at and extending beyond one side of the front surface of the rack 10. This serves to avoid the positioning of the display inhibiting access to other components mounted in the rack 10.

Figures 2A - 2D represent plan views, through the rack, of one example of a support
10 arrangement for enabling the deployment of a display 28 from the storage to a n operative, deployed, position. In this example, the support arrangement includes a slideably mounted carriage carrying the display 28.

Figure 2A represents a storage position of the display 28 within the slot 26. As
15 illustrated in Figure 2A, the front 34 of the slot 26 corresponds to the front of the equipment rack 10. The rear 36 of the slot 26 corresponds to the rear of the equipment rack 10. A first side 38 of the slot 26 is located adjacent the frame 12 at the left-hand side of the frame 12 as viewed in Figure 1. A second side 40 of the slot 26 forms a partition between the slot 26 and an adjacent component. It should be
20 noted that the slot may include side walls are represented by the dashed lines, or it may be open between the uprights of the frame 12. Accordingly, where reference is made to a slot herein, it should be noted that this does not mean that reference is made necessarily to a structure with external walls, but that it may relate to an open structure defined by uprights and cross members of an open frame. The display 28 is supported
25 by hinges 42 to a carriage 44, which, as will be described below, runs on a slide 46.

Figure 2B illustrates a first deployed position of the display 28, in which the display is moved forward to the exterior of the slot 26. As mentioned above, the display 28 is
30 46 and the carriage 44 can be achieved in any desired manner. For example, the slide

46 could be formed with a rail at the top and bottom, respectively, of the slot 26, with the carriage 44 being formed with runners for running on each of the rails at the top and bottom of the slot 26. Alternatively, the slide 46 could be configured as a elongate plate, for example only at the bottom of the slot 26, with a lower end of the carriage 44 being formed with left and right "U" shaped runners for engaging about either side of the plate. The runners could include a sliding bearing using a low friction plastics material such as nylon or PTFE (polytetrafluoroethylene).

Figure 2C illustrates a second deployed position of the display 28, in which the display 28 has been pivoted with respect to its position in the first deployed position about a substantially vertical axis about the hinges 42 on the carriage 44, the hinges forming a pivot mechanism. Thus, once the display 28 has been slid into the first deployed position externally of the slot 26, it may be swung into a position extending to the side of the rack 10. A display surface, or screen, 32 is then visible from the front of the rack, this position defining an operative deployed position.

Figure 2D illustrates a further adjustment of the display, whereby the carriage 26 enables the display 28 to be tilted, to facilitate reading of the display surface 32.

Figure 2E illustrates, in more detail, one possible embodiment of a support mechanism that facilitates the tilting of the display as represented in Figure 2D. In the arrangement shown in Figure 2E, the carriage 44 includes an upper portion 48, a lower portion 50, and an intermediate portion 52 connecting the upper and lower portions. At the upper portion 48 of the carriage 44, a first pivot 421 is arranged to have a further degree of freedom allowing the angle of the display to be moved about a horizontal axis. This is achieved in any conventional manner, for example by providing the hinge with tapered engaging surfaces, or through the use of a universal joint, or by means of a compound hinge. At the lower portion 50 of the carriage 44, an extension mechanism 54 includes a first bar 56, and a second bar 58. The first bar 56 is connected by a first extension hinge 60 to the bottom portion 50 of the carriage

44 and by a second extension hinge 62 to the second bar 58. The second bar 58 is also connected via a third extension hinge 64 to a second pivot 421 connected to the bottom of the display 28. When the display is in the storage position and the first and second deployed positions as illustrated in Figure 2A, 2B and 2C, respectively, the

5 bars 56 and 58 are substantially vertical and in contact and the display is retained substantially parallel to the centre portion 52 of the carriage 44. When the display is in the second deployed position illustrated in Figure 2C and it is desired to adjust the angle of the display 28, the bars are pivoted apart, for example to a position as shown in Figure 2E, to achieve a desired angle of the display with respect to the vertical. By

10 configuring one or more of the hinges 60, 62 and 64 as a friction hinge, the display 28 can be held in any desired angle with respect to the vertical, subject to the maximum possible extension when the bars 56 and 58 are substantially horizontal. As a possible alternative, a ratchet mechanism could be provided so that the bars 56 and 58 can be held locked in a desired orientation with respect to the vertical. It can be seen

15 therefore, that the display is then pivotable about two axes, one substantially vertical, for the movement between Figures 2B and 2C, and one substantially horizontal, for the movement between Figures 2C and 2D.

In the above description, the display 28 is arranged at the left-hand side of the rack. It

20 will be appreciated, however, that the display 28 could, alternatively, be arranged at the right-hand side of the rack (as viewed from the front) and could be deployed to the right-hand side of the rack. Indeed, if the placement of the display in front of part of the rack is acceptable, the slot 26 and the display 28 could be located at any appropriate position within the frontal area of the equipment rack.

25 In the description above, the use of a sliding support arrangement for the display has been described. Figures 3A - 3D illustrate an example of an alternative, pivotal support arrangement. If a pivotal arrangement is used, and the display 28 is non-circular, then it will be necessary for the slot 26 to be taller than that required exactly

30 for the dimensions of the display 28 to allow for the pivoting movement of the

display. Figures 3A – 3D show a front view, that is a view from the front of the rack 10.

Figure 3A is a front view (as viewed from the front of the rack), showing the display 5 28 in a storage position within the slot 26. It will be noted that the slot 26 is taller than the visible dimension of the display 28, which in this embodiment forms an upper surface 66 of the display 28. The display 28 is supported at the top 74 of the slot 26 by means of a universal joint 76, which enables the display 28 to be pivoted from within the slot 26 to a position as shown in Figure 4B and as represented by the 10 arrow 78.

In a first deployed position illustrated in Figure 3B, after swivelling of the display about the universal joint 76, and represented by the arrow 78, the upper surface 66 is now at the top of the display 28. A first side 68 of the display 28 facing towards the 15 slot 26 and a second side 70 of the display 28 facing away from the slot 26. A lower surface 72 of the display 28 is at the bottom of the display as shown in Figure 3B. In this example the display screen 32 is to the right as seen in Figure 3B.

Figure 3C shows a further operation in the deployed position, whereby the display 20 is swung to the left-hand side about the universal joint 76, as represented by the arrow 80, so that this may be viewed from the front by the user.

Figure 3D shows a further operation showing the pivoting of the display 28 with respect to the vertical about the universal joint 76, as represented by the arrow 81, to a 25 position for facilitate reading and operation of the display.

As illustrated in Figures 3A - 3D, the universal joint is located at the upper portion of the slot 26. However, as an alternative, the universal joint could be provided at the lower portion 75 of the slot 26.

In the above Figures, the display has been shown as a panel, for example a flat panel display unit such as a LCD. As can be seen in the Figures, the width and height of the display panel is greater than its thickness. This is advantageous regarding the storage of the display within the rack and also the deployment thereof. In the storage position
5 the display is preferably arranged substantially vertically and also substantially perpendicularly to the front of the rack (i.e. substantially parallel to the sides of the rack). In this orientation, the stored display has a minimum impact on the vertical cooling paths through the rack and on the frontal area of the rack available for other equipment components. If there is an area within the rack where cooling is not an
10 issue, the display could be stored substantially horizontally, rather than substantially vertically. Where an LCD screen is used, this could be of a standard display size, for example with a diagonal across the visible area of, say 33-38cm (13-15 inches).

The display is preferably touch sensitive. This can be achieved in any conventional
15 manner, for example through the use of a touch sensitive overlay for the display screen surface. By providing a display with a touch sensitive screen area, the resulting touch sensitive screen can be used as an interactive input device for inputting information into the processor 32, as will be described later.

20 Figures 4A - 4C illustrates an alternative form of display. In the example shown in Figures 4A - 4C the display is in fact configured as a series of sheets of display material (for example on plasticised card) which are connected to the mount. Figure 5A shows a mount 82 formed as a clamshell hinged at a hinge portion 84. Figure 5B illustrates the opening of the clamshell mount 82 to provide an upper portion 86 and a
25 lower portion 88 connected by the hinge portion 84.

Figure 5C illustrates the full deployed position of the display mount 82 supported in this instance by a universal joint 76 at the lower portion of the slot 26. The lower portion 88 of the clamshell display mount 82 provides a table (or substantially
30 horizontal portion) and the upper portion 86 of the clamshell display mount 82 forms

- a backrest (or substantially vertical portion). Supported within the display mount 82 are a plurality of sheets 90 of display material (for example plasticised card, sheets of plastic, sheets of card, sheets of paper, as appropriate) supported by rings 92 adjacent the hinge portion 84 of the clamshell display mount 82. In use, the user can flick
- 5 through the individual sheets 90 of the display material to obtain the appropriate display of maintenance information needed to carry out a particular maintenance function. Clearly, in such a case, this form of display is not connected to a maintenance processor.
- 10 Figure 5A - 5C illustrate a display configured as a clamshell type portable computer 94, often known as a laptop computer, contained within a clamshell display mount 96. The display mount 96 is hinged at a lower portion 98 and comprises first and second portions 100 and 102, as shown in Figures 5A and 5B.
- 15 Figure 5C illustrates the deployed position of the clamshell display mount 96 showing the portable computer 94 on the display mount 96. The display mount 96 is connected, in the present instance, by a universal joint 76 at the bottom of the slot 26. The portable computer 94 is connected by means of cables 104 to one or more equipment components within the rack 10. The computer 94 includes a LCD display
- 20 106 and a keyboard 108, in a conventional manner.
- Through the use of a portable computer of this type, an inexpensive implementation of display apparatus can be provided, which provide significant advantages over the use of sheet material as represented in Figures 4A - 4C. The portable computer can be
- 25 provided with its own power supply, and/or back-up batteries to enable the continued operation thereof in the event the failure or removal of the power supply to remaining equipment in the equipment rack.
- The portable computer 94 can be programmed with appropriate diagnostic and
- 30 maintenance programs and can be arranged to provide to a service engineer via the

- display 28 a sequence of tasks necessary in order to perform maintenance of the equipment contained within the rack 10. Indeed, by connecting the portable computer 94 to the diagnostic elements of the equipment within the rack, the portable computer 94 can be responsive to information received via the cables 104 about failed or faulty equipment components to control the display of the maintenance tasks to the service engineer. It can be operable to assist in the diagnosis and reporting of faults, and, as a consequence thereof, to navigate the service engineer through an appropriate sequence of operations for repairing or replacing faulty equipment.
- 10 Thus, program code controls the processor to cause the display of an interactive sequence of instructions to service personnel for maintaining the electronic rack equipment, with the program code responsive to the status information for controlling the interactive sequence of instructions.
- 15 Where a portable computer 94 is used as the display apparatus, the maintenance computer 32 shown in Figure 1 can be dispensed with, if desired. As an alternative to the use of a portable computer 94, the combination of a display 28, with a touch sensitive screen and/or other input device(s), and the maintenance computer 34 can provide the same functions as described above with reference to the portable computer
- 20 of Figure 5C. Thus, the maintenance computer 34 can be provided with its own power supply, and/or back-up batteries to enable the continued operation thereof in the event the failure or removal of the power supply to remaining equipment in the equipment rack. Also, it can be programmed with appropriate diagnostic and maintenance programs and can be arranged to provide to a service engineer via the
- 25 display 28 instructions for a sequence of tasks necessary in order to perform maintenance of the equipment contained within the rack 10. The maintenance computer 34 can be connected to diagnostic elements of the equipment within the rack and be responsive to information received about failed or faulty equipment components to control the display of the maintenance tasks to the service engineer. It
- 30 can be operable to assist in the diagnosis and reporting of faults, and, as a

consequence thereof, to navigate the service engineer through an appropriate sequence of operations for repairing or replacing faulty equipment.

- Figure 6 is a flow diagram illustrating a series of steps illustrating the use of
- 5 interactive display apparatus using a touch sensitive screen and maintenance computer connected to the equipment within the rack for the sensing and reporting of faults and the guiding of the service engineer through maintenance tasks to repair the faulty equipment.
- 10 In step S1, the maintenance computer (which, as examples only, can be integrated in the rack as in Figure 1, or integrated with the display as in Figure 5) is responsive to a fault of component in the rack. The remote reporting of the rack could be a function of the maintenance computer or of another component of the rack, and does not form part of the present invention.
- 15 In step S2, a service engineer, who will have been made aware of the fault by the aforementioned remote reporting procedure, deploys the display from its storage position within the rack to a deployed operative position as described above with respect to the example constructions in Figures 2 and 3.
- 20 In step S3, the maintenance computer displays an initial screen to the service engineer, which can include, for example, a secure log-on procedure to identify the service engineer as an authorised person to carry out maintenance tasks. If a log-on procedure is employed, the successful completion of this is required before proceeding to step S5
- 25 In step S4, an interactive maintenance process occurs that involves the display of screens giving instructions to the service engineer, the carrying out of those instructions by the service engineer and the service engineer making appropriate selections to proceed through the series of tasks using the touch sensitive screen to
- 30 select appropriate options. In this process, the processor can be operative to control

the navigation through the screen displays and the tasks in a passive way in response to the selections of displayed buttons, etc., by the service engineer. Alternatively, the processor can be programmed to control the navigation through the screen displays and the tasks in an active way dependent upon information received from the service
5 engineer or automatically from the equipment as to the configuration of the equipment components and/or the models and/or versions of those components and/or faults in the equipment components, for example.

In step S5, following completions of the maintenance tasks, the service engineer
10 returns the display to its storage position.

It will be appreciated that although particular embodiments of the invention have been described, many modifications/additions and/or substitutions may be made within the spirit and scope of the present invention. Accordingly, the particular example
15 described is intended to be illustrative only, and not limitative.

WHAT IS CLAIMED IS:

1. Rack mountable display apparatus for an electronic equipment rack, said apparatus comprising a support mechanism for a display, the display being moveable between a storage position within the rack and a deployed position external to the rack.
2. The apparatus of claim 1, wherein the support mechanism comprises a slide, the display being slideable between the storage position with the display stored within the rack and the deployed position with the display deployed externally to the rack.
3. The apparatus of claim 1, wherein the support mechanism comprises a pivot mechanism, the display being pivotable between the storage position with the display stored within the rack and the deployed position with the display deployed externally to the rack.
4. The apparatus of claim 2, wherein the support mechanism comprises an orientation mechanism operable to orient the display in the deployed position to facilitate reading of the display.
5. The apparatus of claim 4, wherein the orientation mechanism provides rotation about at least one axis.
6. The apparatus of claim 4, wherein the orientation mechanism provides rotation about two axes.
7. The apparatus of claim 3, wherein the pivot mechanism is formed by a universal joint operable to enable pivoting of the display between the storage position with the display stored within the rack and the deployed position with

the display deployed externally to the rack and further to enable orientation of the display to a desired orientation to facilitate reading of the display.

8. The apparatus of claim 1, wherein the thickness of the display is less than the height and width of the display.
9. The apparatus of claim 8, wherein, in the storage position, the display is located vertically.
10. The apparatus of claim 1, wherein the display comprises a plurality of sheets of display material.
11. The apparatus of claim 1, wherein the support mechanism comprises a carrier for sheet display material.
12. The apparatus of claim 1, wherein the display comprises a display screen.
13. The apparatus of claim 1, wherein the display screen is a flat panel display screen.
14. The apparatus of claim 1, wherein the display comprises a touch sensitive screen.
15. The apparatus of claim 1, wherein the display is connected to a processor.
16. The apparatus of claim 15, wherein the processor is retained within the rack when the display is deployed.
17. The apparatus of claim 15, wherein the processor is deployed with the display.

18. The apparatus of claim 17, wherein the display and the processors are part of a portable computer.
19. The apparatus of claim 15, further comprising a keyboard connected to the
5 processor.
20. The apparatus of claim 15, comprising program code for controlling the processor to cause the display of an interactive sequence of instructions to service personnel for maintaining the electronic rack equipment.
- 10 ~~21.~~ An electronic equipment rack, including a plurality of locations for receiving electronic equipment components and a location for receiving rack mountable display apparatus, said apparatus comprising a support mechanism for a display, the display being moveable between a storage position within the rack
15 and a deployed position external to the rack.
22. The rack of claim 21, wherein the display is located in a substantially vertical orientation extending back into the rack from a front surface thereof when in the storage position within the rack.
- 20 23. The rack of claim 22, wherein the display location is adjacent one side of the rack.
24. The rack of claim 23, wherein the display is positioned to extend beyond one
25 side of the rack when in the deployed position, thereby not to inhibit access to rack mountable component.
25. The rack of claim 21, comprising a plurality of system electronic system components.

26. The rack of claim 25, wherein the display is connected to a processor and the processor is connected to at least one of said electronic system components for receiving status information, program code is provided for controlling the processor to cause the display of an interactive sequence of instructions to service personnel for maintaining the electronic rack equipment, and said program code is responsive to the status information for controlling the interactive sequence of instructions.
27. A method of providing maintenance information to personnel for maintaining electronic equipment mounted in a rack, the method comprising providing a support mechanism for a display, the display being moveable between a storage position within the rack and a deployed position external to the rack and providing maintenance information to the support personnel when the display is located in the deployed position.
28. A method according to claim 27, comprising providing maintenance information on a plurality of sheets of sheet material.
29. A method according to claim 27, comprising providing maintenance information on a display screen.
30. A method according to claim 29, comprising providing an interactive sequence of maintenance information on a display screen.
31. A method according to claim 30, comprising providing an interactive sequence of maintenance information that in response to status information regarding electronic equipment in the rack.

ABSTRACT OF THE DISCLOSURERACK MOUNTABLE DISPLAY APPARATUS

- 5 Rack mountable display apparatus is provided for an electronic equipment rack. The apparatus includes a support for the display whereby the display is moveable between a storage position within the rack and a deployed position external to the rack. The display can be in the form of sheets of material supported on a mount, or could be in the form of an electronic display in combination with a processor. The processor
- 10 could be located within the rack, or could be deployed with the display, for example where the display is part of a portable computer. The display is used to provide maintenance information to a maintenance engineer to facilitate maintenance of the rack mounted equipment.

1/8

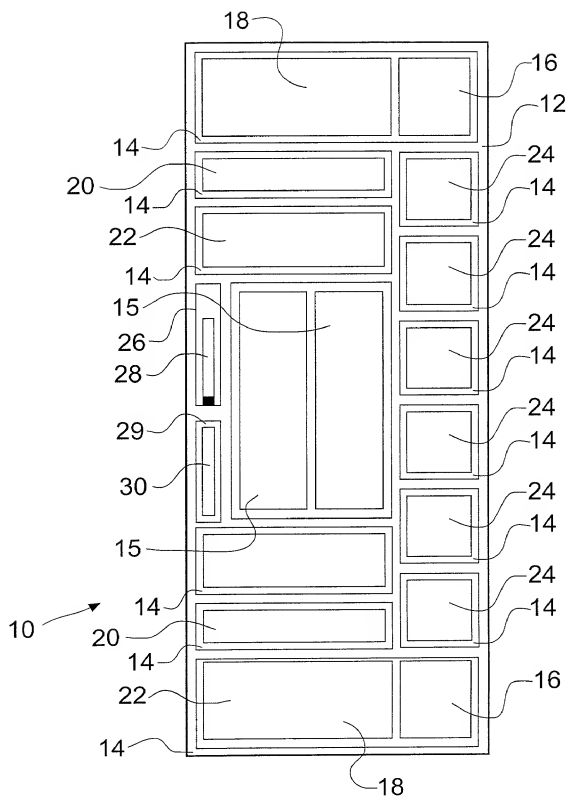


Fig. 1

2/8

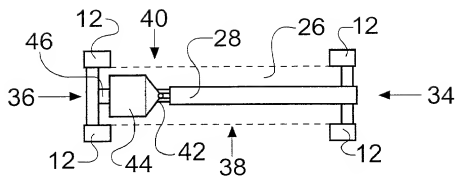


Fig. 2A

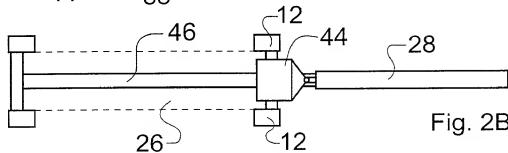


Fig. 2B

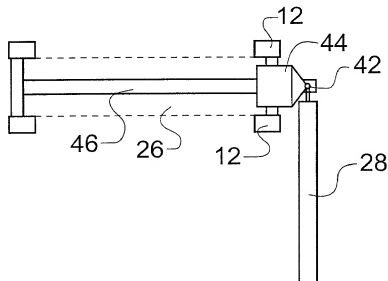


Fig. 2C

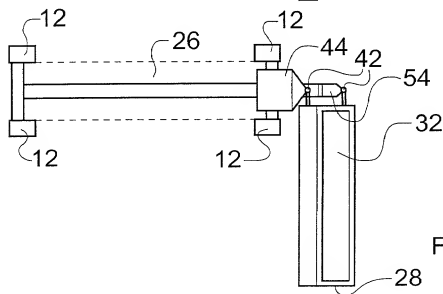


Fig. 2D

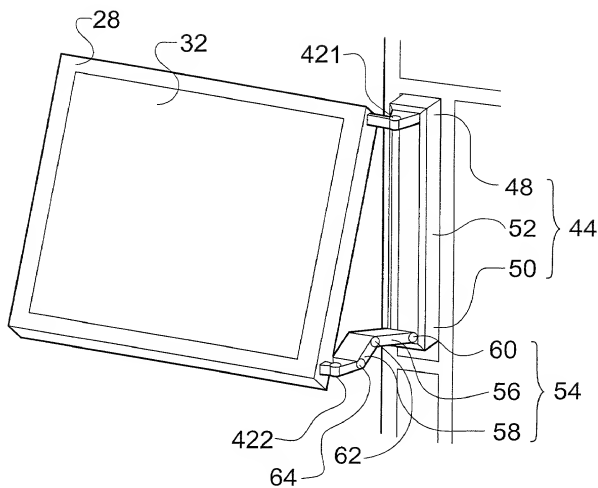


Fig. 2E

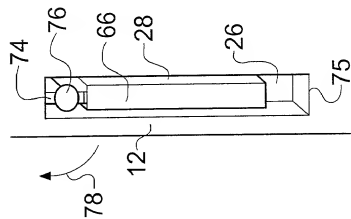


Fig. 3A




Fig. 3C




Fig. 3B




Fig. 3D




Fig. 4A




Fig. 4B

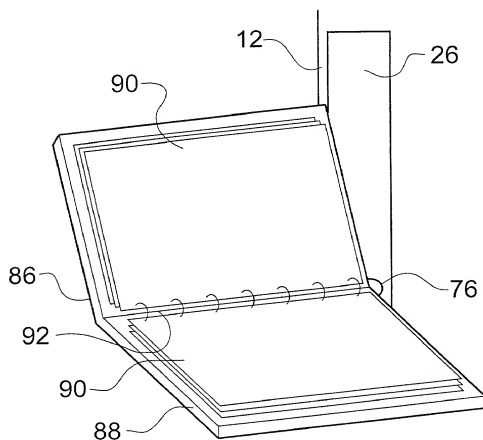


Fig. 4C




Fig. 5A




Fig. 5B

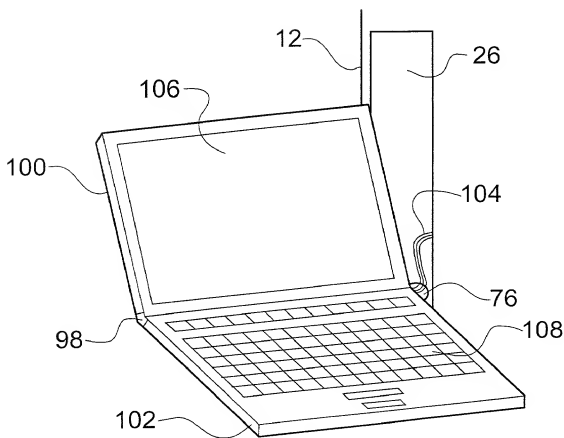


Fig. 4C

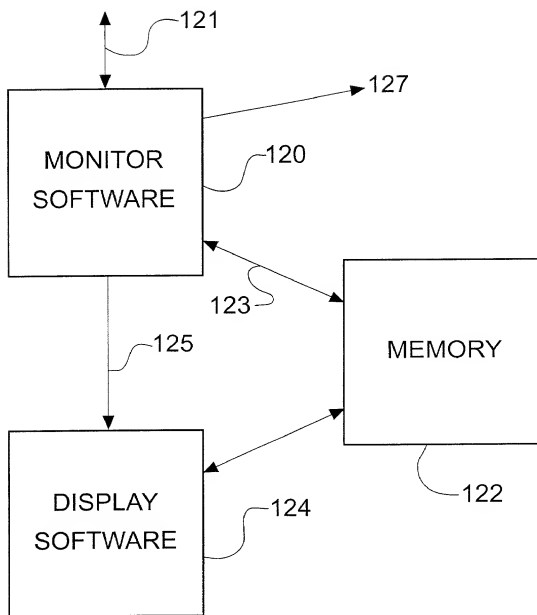


Fig. 6

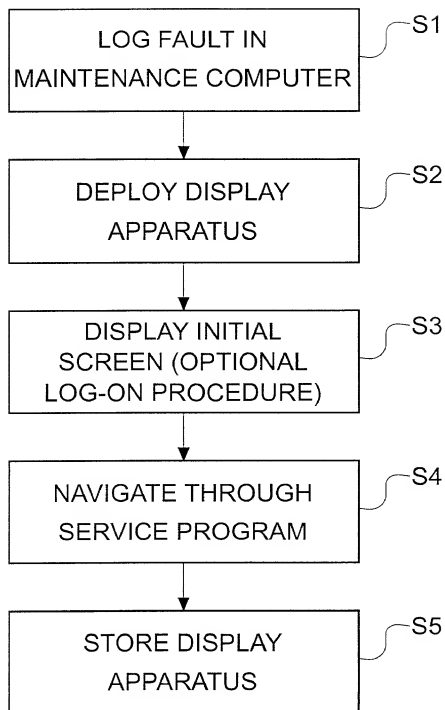


Fig. 7

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "RACK MOUNTABLE DISPLAY APPARATUS," the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____
 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate listed below, or under § 365(a) of any PCT international application listed below designating least one country other than the United States of America, and have identified below any foreign application for patent or inventor's certificate, or of any PCT international application, having a filing date before that of the application on which priority is claimed.

<u>Prior Foreign Application No.</u>	<u>Country</u>	<u>Filing Date</u> (mm/dd/yy)	<u>Priority</u> <u>Claimed</u>	<u>Cert. copy</u> <u>Attached</u>
0008722.1	UK	04/07/00	Y	N

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

<u>Provisional Application No.</u>	<u>Filing Date</u> (mm/dd/yy)
N/A	

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below, or under § 365(c) of any PCT international application listed below designating the United States of America, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information known to me to be material to the patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Parent Application No.</u>	<u>Filing Date</u> (mm/dd/yy)	<u>Parent Patent No. (if applicable) or Status</u>
N/A		

I hereby revoke any previous Powers of Attorney and appoint

Kenneth Olsen	Reg. No. 26,493
Timothy J. Crean	Reg. No. 37,116
Joseph T. FitzGerald	Reg. No. 33,881
Robert S. Hauser	Reg. No. 37,847
Alexander E. Silverman	Reg. No. 37,940
Christine S. Lam	Reg. No. 37,489
Anirna Rakshpal Gupta	Reg. No. 38,275
Sean P. Lewis	Reg. No. 42,798
Michael J. Schallop	Reg. No. 44,319
Bernice B. Chen	Reg. No. 42,403
Kenta Suzue	Reg. No. 45,145
Noreen A. Krall	Reg. No. 39,734
Richard J. Lutton, Jr.	Reg. No. 39,756
Monica D. Lee	Reg. No. 40,696
Marc D. Foodman	Reg. No. 34,110
Naren Chaganti	Reg. No. 44,602

each of said attorneys being employed by Sun Microsystems; and

Dan R. Christen	Reg. No. 39,943
Gentry E. Crook	Reg. No. 44,633
Kevin L. Daffer	Reg. No. 34,146
Mark R. DeLuca	Reg. No. 44,649
Jeffrey C. Hood	Reg. No. 35,198
Robert C. Jahnke	Reg. No. 44,800
B. Noël Kivlin	Reg. No. 33,929
Robert C. Kowert	Reg. No. 39,255
Lawrence J. Merkel	Reg. No. 41,191
Eric B. Meyertons	Reg. No. 34,876
Louise K. Miller	Reg. No. 36,609
David W. Quimby	Reg. No. 39,338
Larry D. Thompson	Reg. No. 43,952
David A. Rose	Reg. No. 26,223

each of said attorneys or agents being a member or an associate of the firm of Conley, Rose & Tayon, P.C., as attorney or agent for so long as they remain with such company or firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive the Letters Patent.


Please direct all communications to:

B. Noël Kivlin
Conley, Rose & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767-0398
Phone: (512) 476-1400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made herein on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under

18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: CYNTHIA MARY MILTON

Inventor's Signature:  Date: 3 July 2000

City and State (or Foreign Country) of Residence: Thatcham, UK Citizenship: UK

Post Office and Residence Address: 70 Roman Way, Thatcham, Berkshire RG18 3BS, UK
(Include number, street name, city, state and zip code)